



Instagram

Website

YouTube

Youtube-EDA Channel


Facebook

Endo with Eighteeth

www.eighteeth.com

 Changzhou Sifary Medical Technology Co., Ltd
Add: NO.99, Qingyang Road, Xuejia County, Xinbei District, Changzhou City, 213000 Jiangsu, China
Email: ivy@sifary.com
Web: www.eighteeth.com

DISTRIBUTED BY

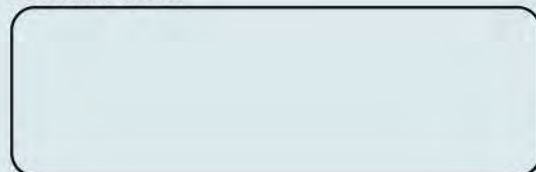

CATALOG

| | |
|--|-------|
| HyperLight Portable X-ray unit | 01-04 |
| NanoPix Intraoral X-Ray Sensor | 05-08 |
| Helios 600 Intraoral Scanner | 09-14 |
| AirPex Wireless Apex Locator | 15-16 |
| E-CONNECT & E-PEX Cordless Endomotor & Apex Locator | 17-22 |
| E-connect S Endomotor With Built-in Apex Locator | 23-24 |
| E-value Brushless Endo Motor | 25-26 |
| E-xtreme Make Essence to Extreme | 27-28 |
| Fast-Pack & Fast-Fill Cordless Obturation System | 29-36 |
| Ultra X Cordless Ultrasonic Activator | 37-38 |
| UltraMint & UltraMint Pro All-round Ultrasonic Scaler | 39-44 |
| CuringPen 4 LEDs Curing Light | 45-46 |





HyperLight

Portable X-ray unit



HyperLight



Engineered for accurate images

- Clinical Imagery



- Sharp, high resolution images with a **0.4mm** focal spot

Source focal spot Source focal spot



Effect of focal spot size



Designed with safety in mind



Built-in leaded double shield to protect the operator from leakage radiation



Locking system to prevent unintentional exposure

Specifications



| | | | |
|--------------|------------|---------------------|----------------------|
| Model | HyperLight | Weight | 1.8 kg |
| Focal Spot | 0.4 mm | Battery | 2500 mAh x 4 |
| Tube Voltage | 65 kV | Exposure Time Range | 0.02-2 Sec |
| Tube Current | 2.5 mA | Line voltage | 100V-240V, 50Hz/60Hz |

HyperLight



Simplify your digital workflow


- Compact size and lightweight can make you operate it by one hand only
- Intuitive user interface
- Smart angulation system

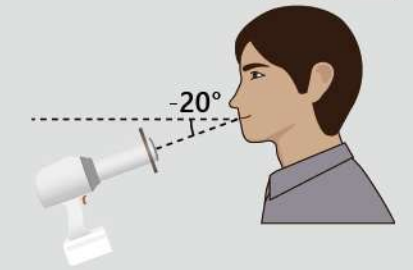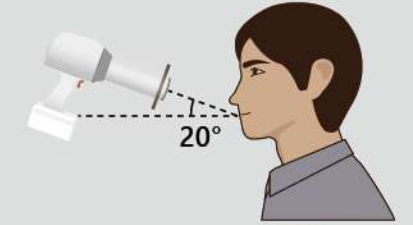

Maximize your diagnostic potential

Perfect combination



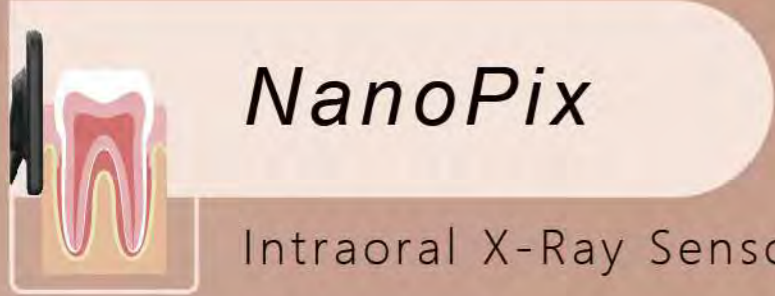


NanoPix


Intraoral X-Ray Sensor



1/10 Cost per patient compared to film
 3s To complete entire imaging process
 50000+ Exposures with no quality loss

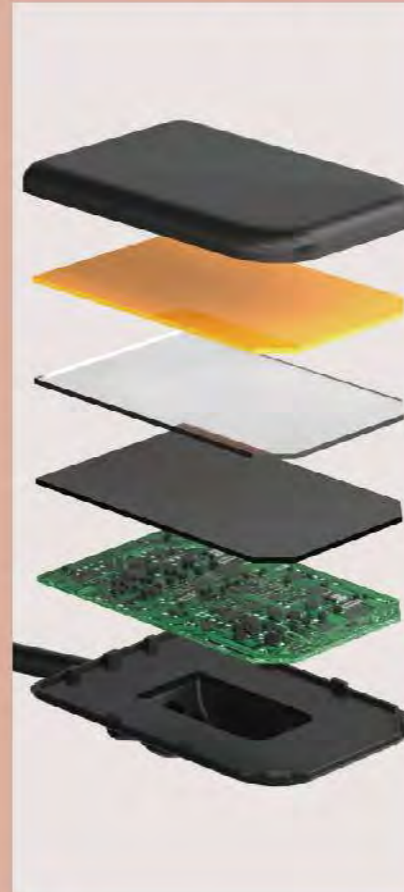




Leading technologies : The 1st time in dentistry

- 
AED Technology (Automatic Exposure Detection)
 - from chest radiography
 - Compatible with almost all DC and AC X-Ray generators
 - Digital images comes automatically when your X-Ray is switched on
- 
APS CMOS Technology
 - from aerospace industry
 - High signal-to-noise ratio with maximum details
 - Long life and low power consumption
- 
Direct Deposition CSI Technology
 - from chest radiography
 - Low dose radiation for safety
 - Less exposure time but higher resolution

All-in-one
 The most economical X-Ray sensor in the world



Unique design

- 
Ergonomic design
 Cupped cable connection ensures comfortable finger positioning
- 
Robust cable connection
 70000+ Bendings RA test passed
- 
Ultra-thin body design
 4.4mm - the thinnest X-Ray sensor

Easy-of-Use software with only 4 steps


● Step 1. Choose 'Patient'



● Step 2. Image 'Acquisition'



● Step 3. View Image

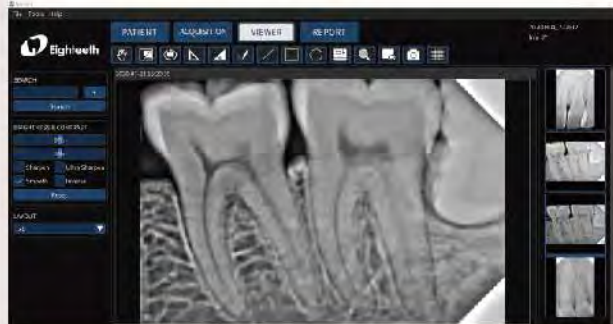

● Step 4. Generate 'Report'



The Complete Image Solution: excellent combination of DR Pad & its base

-  pre-installed software
-  multiple USB ports for diverse needs
-  build an instant connect with users



IP68
INGRESS PROTECTION
...against SOLIDS
...against LIQUID

Specifications(available in 2 sizes)

| | NanoPix 1 | NanoPix 2 |
|------------------------|---------------|---------------|
| Detector Technology | APS CMOS | APS CMOS |
| Scintillator | CsI | CsI |
| Pixel Matrix | 1000*1500 | 1300*1800 |
| Theoretical Resolution | 25lp/mm | 25lp/mm |
| True Resolution | 20lp/mm | 20lp/mm |
| Active Area (mm) | 20*30 | 26*36 |
| Mechanical Size(mm) | 25.4*36.8*4.4 | 30.4*41.9*4.4 |
| AD Conversion(bit) | 16 | 16 |
| Data Interface | USB 2.0 | USB 2.0 |
| Protection | IP68 | IP68 |



Helios 600

Intraoral Scanner



Start your smooth digital journey with Helios 600!

Why bother?

High accuracy with automatic and adaptive calibration, manual calibration is not necessary any more.

Ready for your digital experience-

One of the most accurate and fastest scanners on the market.

Ready for your hand-

Small enough to operate it easily, though it achieves a 16mm x 14mm high-definition field of view.



Lighter

198 grams, one of the most lightweight scanners on the market, well-balanced, ergonomically designed, and easy to carry.



Faster

With Helios 600 you can take a full arch scan in less than 30 seconds.



Smarter

AI technology filters the soft and moving tissues, offering users a smooth scanning experience and generating a natural-looking treatment outcomes.



More accurate

As one of the most accurate scanners on the market, Helios 600 has reached the state-of-the-art accuracy level- the average deviation of a in-vivo full arch scan is around 20µm.

Helios 600

Not only a comprehensive intraoral scanner, but also an intraoral camera!

 L 16mm x 14mm  S 12mm x 12mm

Removable scanner tip - 2 optional sizes

LED Light Source
Powder-Free
Anti-Fogging



Attitude sensor for a better interaction with customers



Two start /stop buttons are provided on both sides for easier scanning



Button for switching the upper jaw, lower jaw or bite mode




USB port for power delivery and data transfer



Firm body design with durability



Plug & Scan

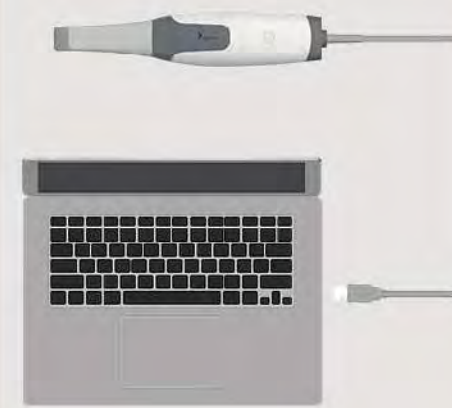

- Smart Reminder
- Air mouse
- Automatic software update
- Timely after-sales service
- Cloud Storage
- Voice Memo
- Online 3D viewer

Specification

Helios 600

| | | |
|--------------|-----------------------|-------------------|
| Accuracy | Full-arch | 20.0μm |
| Scan area | 16 x 14mm (L) | |
| | 12 x 12mm (S) | |
| Handpiece | Dimension | 219 x 46 x 36mm |
| | Weight | 198g |
| | Capture button | Two sided |
| Tip | Tip size (front part) | 22 x 18mm (L) |
| | | 18.6 x 16.7mm (S) |
| Connectivity | Length | 1.8m |
| | Type | USB 3.0 |
| Calibration | Accuracy calibration | Calibration-free |
| | Color calibration | Calibration-free |
| Special mode | Remote control mode | |

Recommended System Requirements


| | |
|------------------|---|
| Processor | Intel®Core™ i7 9th Generation, base frequency 2.6 GHz (or better) |
| Memory | 16GB (or more) DDR4, frequency 2666 MHz (or better) |
| Hard Drive | 512GB (or more) SSD |
| Graphics card | NVIDIA® GeForce® GTX 1650 (or better) |
| Display | 15.6" FHD (1920 x 1080) (or more) |
| Others | USB 3.0 port |
| Operating system | Windows 10 Pro |
| Optional | Touch screen |



AirPex

Wireless Apex Locator

International Patent
No.:PCT/CN2019/110429

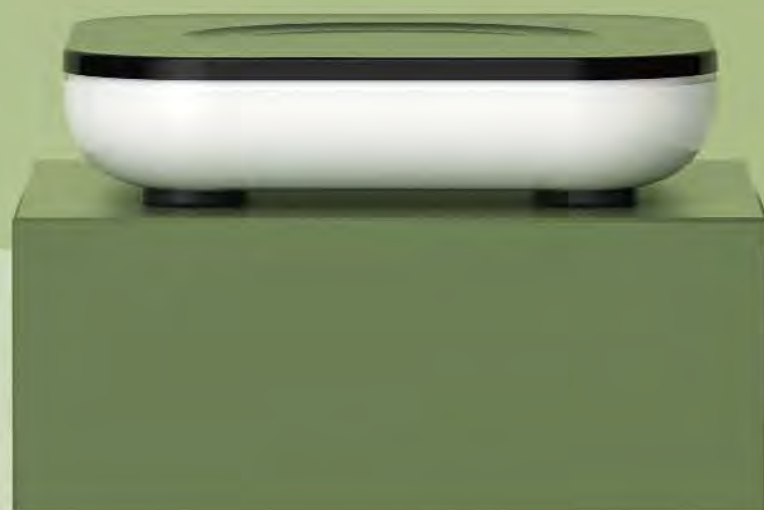

Feel the Charm of Wireless Charging

Lay it down , Charge it up
Charging is as simple as placing
the AirPex on the charging base



True Wireless Apex Locator

Get rid of the wire to the fullest
Use without magnet wire
Accuracy through wirelessness



E-CONNECT & E-PEX

Cordless Endomotor & Apex Locator





E-CONNECT

Cordless Endo Motor



Torque Calibration



Powerful 1500 mAh Lithium Battery



Digital OLED Display



Integration Option



Low Noise Motor



Screen Cast / Mirroring



Ambidextrous * Display

*User can rotate the Endomotor Screen towards left or right
*In connect function Endomotor mirrors Apex Locator's screen



Five Reciprocation Modes (MO)



Reverse Reciprocation-One Mode
Counter clockwise & clockwise movement

Fwd 30° - Rev 150°
For reciprocating files



Forward Reciprocation-Four Modes
Clockwise & counter clockwise movement

Fwd 150° - Rev 30° Fwd 180° - Rev 30°
Fwd 210° - Rev 30° Fwd 250° - Rev 30°
For all continuous rotation files



Nine Editable Memory Programs (M1 to M9)

RPM Maximum Speed 1000 rpm

Forward Direction of Rotation

360° Clockwise Rotational Movement

Reverse Direction of Rotation

Editable Speed / Rpm Setting

Torque Auto Reverse

Editable Torque setting



One Piece Contra Angle Head

340° Adjustable Handpiece

Detachable Head

Miniature Head

Autoclavable



E-PEX

Smart Apex Locator



Integrate Endomotor with Apex Locator (Connect Function)

- Auto Start & Stop
- Apical Reverse
- Apical Slow Down



Smart Accurate and Reliable Apex Locator

- Advanced Multi - frequency Technology
- High Precision in Wet & Dry Canals
- Large 3.5" LCD Display
- Automatic Calibration
- Compact Size & Stable Design

Screen Display & Its Meaning

| | Interface | Interface | Interface | Interface |
|---------|--|--|--|---|
| Display | | | | |
| Value | 12 | 09 | 00 | -3 |
| Meaning | The corresponding scale value is 2, indicating the distance from the apex is about 2mm | It indicate that the distance from the apex is about 1.5mm | It indicates that the endo file reaches the apex | It indicates that the root canal file has exceeded the apex |
| Alarm | Didi alarm sound for a long time interval | Didi alarm sound interval becomes shorter | Uninterrupted long beep | Very rapid Didi alarm sound |



E-connect S

Endomotor With Built-in Apex Locator



Torque Calibration
For precise torque output


OLED Screen
Digital OLED Display

Ambidextrous Display
Screen can be rotated as per Left or right hand use


Powerful Battery
Heavy duty 1500mAh Lithium battery



M0 - Stand Alone Apex Locator Mode

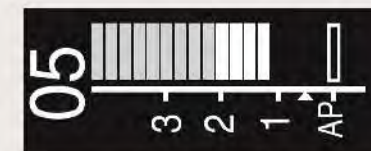

Apex Locator Bar

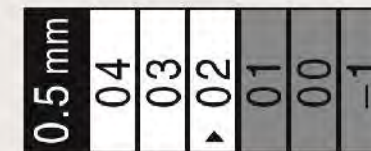

Zoom-in & Flash Bar
(when file goes beyond 0.5mm)

APEX LOCATOR

- **Apical control with rotary instruments**
Position of file is displayed on screen and the motor rotates in reverse direction when file reaches pre-set apical working length, to prevent over instrumentation
- **Manual canal measurement**
Manual file clip can be used to measure canals precisely with hand files
- **Multi frequency technology with high accuracy & precision**
- **Apex locator flash bar with zoom-in function**

Working Modes:

FWD - Clockwise Continuous Rotation

REV - Anti-clockwise Continuous Rotation

REC - Reciprocation Movement

First-in-class cordless open motor with adjustable angles of rotation ranging from 30° to 370° for reciprocation as per user's need

First-in-class feature of speed adjustment in reciprocation mode

ATC - Adaptive Torque Control

ATC manages the file stress in a smart way. When torque limit is reached, instead of going into reverse mode, motor reciprocates till the stress is reduced. Once back to below pre-set torque level, file will again rotate in continuous rotation

Integrated mode features:

- **Auto Start & Stop** - Motor starts working when the file enters inside root canal, and stops when withdrawn
- **Apical Reverse** - When the file reaches pre-set apical reverse point, user can define whether the file starts moving in reverse direction
- **Apical Slow Down** - To preserve the cemento-dentinal junction and avoid file separation, speed of motor slows down when file is in apical region

Specifications:

Rotational Speed Range : 120-1000 rpm
Torque Range : 0.5-4.0 N.cm
Memory Programs : 11 (M0 to M10)
Battery Capacity : 1500 mAh



E-value

Brushless Endo Motor

Specifications:

- Speed Range : 120-1000 rpm
- Torque Range : R.L-4.0 N.cm
- Memory Programs : 10 (M1 to M10)
- Battery Capacity : 1900 mAh



OLED Color Screen
More comfortable visual experience



Built-in File System
Switch file systems quickly



360° Rotatable
360° Rotatable Contra Angle



Brushless Motor
Reliable, Durable, Efficient



Long Battery Life
Heavy capacity
1900mAh lithium battery



Mini Contra Angle
Advanced 1:1 contra-angle
One piece design




New contra-angle head




Normal head & neck

Built-in File System

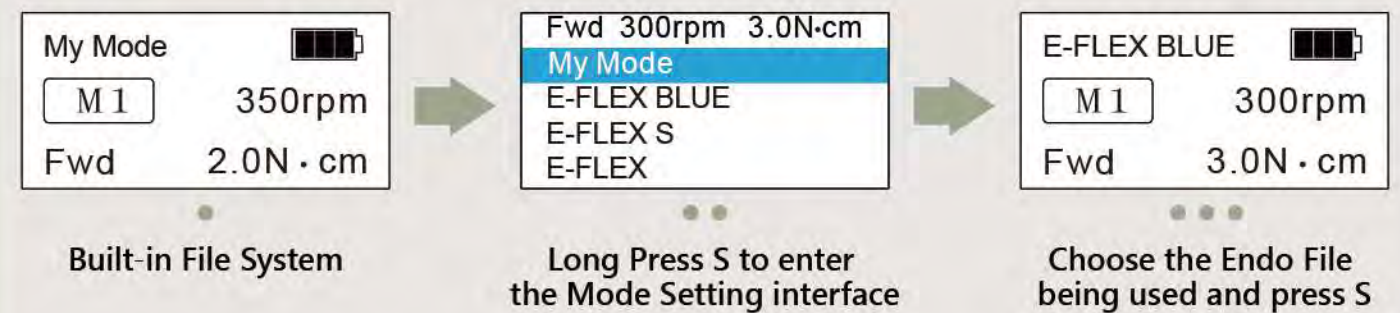

Note: the doctor could adjust the speed, torque limit and reciprocating angle according to the needs of the case.

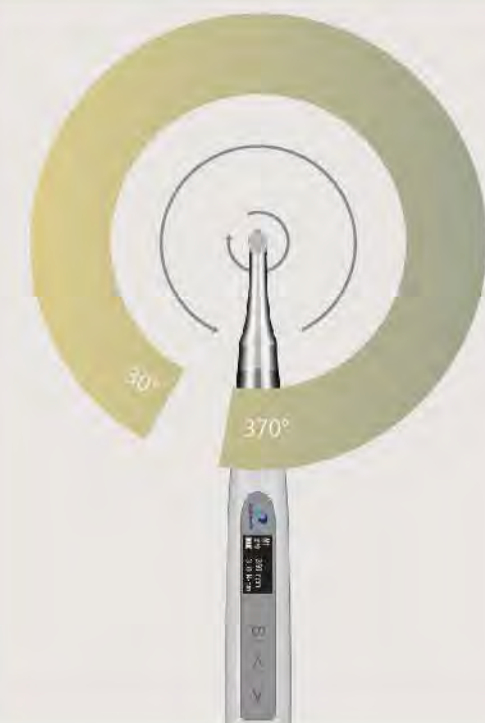

Working Modes:

- Fwd - Forward Rotation
- Rev - Reverse Rotation
- REC - Reciprocation Mode
Doctor could set the reciprocating angle and speed level according to actual needs
- Speed Level range from Level 1 to Level 5
- Angles range from 30° to 370°
- ATC - Adaptive Torque Control Mode
After reaching the preset torque limit, motor will reciprocate according to the set angle to improve the efficiency of root canal enlargement





E-xtreme

Make Essence to Extreme

Smaller | Lighter | Quieter than ever



360° contra-angle rotation



Slim and compact design for maximum comfort and mobility



Miniature contra-angle for better visibility & easier posterior access

– Miniature contra-angle Super Mini head & thin neck



– Normal head & neck



Eighteeth innovative motor, cutting down the noise from inside, allowing you to experience the tranquility.



Less than 100 grams, reducing hand fatigue during treatment, providing the ultimate E-xtreme experience.



Reciprocation function



Built-in file system

Specifications

| | | | |
|---------------|---------------------|--------------|-----------------|
| Model | : E-xtreme | Power supply | : 100 V-240 V |
| Weight(grams) | : 99 g | Frequency | : 50 Hz / 60 Hz |
| Torque range | : 0.5 N.cm-4.0 N.cm | Output | : DC 5 V/1 A |

Fast-Pack & Fast-Fill

3D Obturation
Devices





Fast-Fill

Obturation Fill Handpiece



Fast-Fill Tips



- Autoclavable silver tips for multiple usages
- Silver tips maintain the thermoplastic temperature of GP and offers smooth flow inside canal
- 360 ° rotating tip for easy filling at all angles
- Extra long needle offers convenience and visibility
- Easy to maintain and replace

Motorized GP Flow



- Provides consistent flow of GP at desirable rate
- Precludes voids and makes obturation homogeneous
- Eliminates hand fatigue that resulted from earlier gun type devices

Comprehensive Display



- Three customizable memory programs - T1 to T3
- Temperature range 100 °C - 200 °C
- GP flow rate - Low, Medium, High
- Reserve GP level indicator

Intuitive Design



- Sleek and ergonomic hand-piece
- Simple push button to dispense GP
- LED indicator reflects when the device is ready for use

Powerful Battery



- Highly efficient 2600mAh Lithium battery
- Direct Plug & Play - In case of low battery, use the device directly with adaptor

Specifications

| | |
|------------------|---|
| Heating Time | 20 seconds to 200 °C |
| Charging Time | 4 hours to complete charge |
| Hexagonal Wrench | Use the wrench to bend the tip, rotate the tip and clean the device |



23 Gauge Large



25 Gauge Small



Fast-Pack

Obturation Pack Handpiece




- Temperature Range**
- Wide temperature range of 90° to 250°
 - Five memory programs to customize temperature and cut-off time as per obturation material used or any other intended use of the device
- Internally Heated Tip**
- Only the working end (4 - 6 mm) of the tip is heated - avoids need for insulating sleeves
 - The non-working end is insulated and stays cool avoiding soft tissue burn
- Class-leading Controlled Heating**
- Fast heating - Quick heating prevents PDL damage
 - Swift cooling - Swift cooling ensure GP does not follow along the heating tip
- Experience Ergonomics**
- 360° start / stop ring button allows holding the device in any angle comfortable for you
 - Left - right handed operation
 - Comfortable grip, light in weight
- Powerful Battery**
- Highly efficient 2600mAh Lithium battery
 - Direct Plug & Play - In case of low battery, use the device directly with adaptor

Specifications

| | |
|----------------|--|
| Heating Time | 0.2 seconds for 200 °C 0.5 seconds for 250 °C |
| Cooling Time | 2 seconds for cooling |
| Charging Time | 2 hours to complete charge |
| Operating Time | 4 hours of continuous operation at 250 °C |



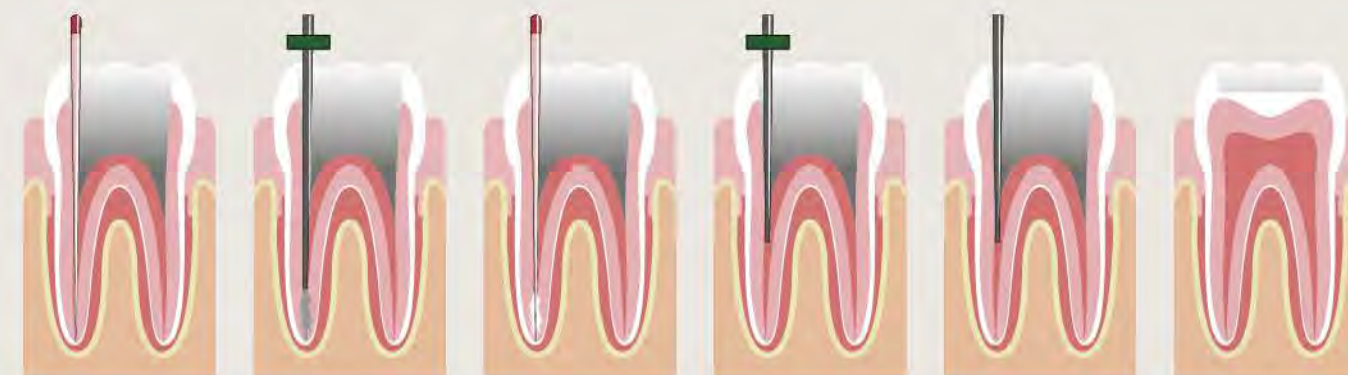

Protocol for Use

Master Cone Verification & Resizing

Select a master cone which corresponds to the master apical preparation. Check for tug-back and confirm the same with radiograph. Resize the GP by cutting it to 0.5 to 1mm short of the working length. This will prevent peri-apical extrusion of the GP

Selection of Fast-Pack & Plugger Tip

Select the Fast-Pack tip which reaches 4-5 mm short of the working length and give a snug fit at the tip. Mark this length using the silicon stopper. Similarly, select the hand plugger which reaches 4-5mm short of the working length

Gutta Percha & Sealer

Coat the master cone apically with the sealer and insert it into the canal. Brush the canal wall using strokes of GP and sealer

Down Pack with Fast-Pack

Remove the GP from the orifice/coronal part with the help of heated Fast-Pack tip. Plug the GP cone with pre-fit hand plugger at the orifice. Now take the heated Fast-Pack tip 4-5mm short of the working length. The bite of GP will come out of the canal along with the tip. Heated Fast-Pack tip will transfer heat to the GP and convert it into thermoplastic state. Condense the GP with the help of hand plugger to ensure the complete sealing of accessory canals and apex

Fill with Fast-Fill

Filling the canal using the Fast-Fill device in increments of 4mm till the canal is filled completely while condensing the warm GP with the appropriate plugger after each increment




Ultra X

Cordless Ultrasonic Activator

Available Tips

| Size | Length(mm) |
|--------|------------|
| #20 2% | 18 & 21 |
| #25 2% | 18 & 21 |




In Action

Cavitation Effect

It is the process of formation of millions of gas bubbles in the irrigation solution. These gas bubbles grow in size, oscillate in different directions and explode into the liquid, producing powerful cleaning action

Acoustic Streaming

It is a unidirectional flow of liquid produced by ultrasonic waves. Movement of tip produces special effect called acoustic turbulence which accelerates the movement in liquid inside the root canal




Indication

Smear Layer Removal

Effective in removal of smear layer and unplugging of dentinal tubules

Dentin Chips Removal

Ultrasonic agitation forms suspension of residual dentinal chips and tissue remnants with irrigant and facilitates their easy removal



Indication

Biofilm Disruption

Ultrasonic cavitation disrupts the biofilm and helps to reduce bacteria load in the canal

Cleaning of Complex Anatomy

Ultrasonic activation helps irrigants to flush into undetected or un-instrumented canal anatomy like isthmus, fins, lateral canals, apical ramification etc. Also helps to remove vapour lock



Protocol

- Prepare the root canal up to required size with the help of shaping and finishing instruments
- Choose the desired disinfectant and flushing agents for cleaning, debridement and disinfection of canals
- Fill the chosen irrigation solution into the canal, never run Ultra X without irrigating solution
- Select the Ultra X tip of desired size and length which passively fits into canal, always keep 2 - 3mm short of apex
- Activate solution using short vertical up & down strokes for 30 seconds. Be careful to not breach apical 2mm
- Use the device gently and never apply pressure or wedge the tip inside the canal. If any points of resistance, then retrieve the ultrasonic tip
- Replenish the irrigating solution, use suction to remove the loose debris. Repeat the cycle 4 to 5 times
- Completely dry the canal and fill it with choice of obturation material
- It is always recommended to isolate the tooth using rubber dam and use personal protective barriers like head gear, mask, eyeglasses etc

Key Features



Key Features



Battery





UltraMint & UltraMint Pro

All-round Ultrasonic Scaler

All-round Ultrasonic Scaler

Scaling | Periodontic | Endodontic



Soft Perio Power for Ultimate Comfort

Autoclavable plastic box - tips*6, universal wrench*1, EMS type handpiece*1

Autoclavable plastic box - tips*6, universal wrench*1, Satelec type handpiece*1



*Applicable for all tips from Eighteenth

Smart touch system-ultrasensitive & waterproof



Intelligent self-cleaning-makes disinfection easy and avoids cross-infection



Two ways of water supply - Changing supply methods is easier than ever before



900ml stand-alone bottle with clear 20ml scale mark makes it convenient for formulating liquid.




Detachable handpiece with LED - autoclavable, ergonomic, brighter visibility



Detachable and autoclavable handpiece holder, resists cross-infection



Water control directly from handpiece



Ergonomic foot pedal



• EMS type

• Satelec type

One scaler, 2 solutions

Wide range of frequency: 25kHz-42kHz

– We are proud to give you two solutions to perform at your best—both handpieces (EMS type and Satelec type) provided by Eighteeth are compatible with UltraMint & UltraMint Pro.*
Scaling can be as convenient as you can imagine.

*Satelec and EMS are trademarks of Acteon® and EMS®, respectively.

AI Engine — Scaling has never been so intelligent!



Customized treatment based on tooth surface conditions



Smart touch control system—ultrasensitive & waterproof



Elliptical stroke patterns with polishing effect




Intelligent degenerative feedback



Digital controlled automatic frequency tracking
Ensures machine works on optimum frequency



Sine wave drive
Avoids simulation caused by instantaneous current output; ensures comfortable treatment

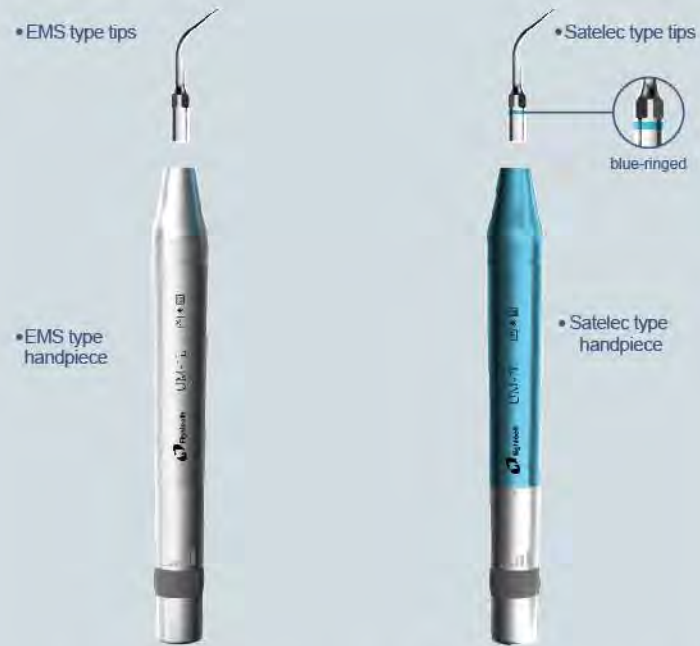

•EMS type handpiece

•Satelec type tips

blue-ringed

•Satelec type handpiece



Tips: G1 G2 G4 P1 P3 E4 universal wrench, EMS type handpiece



Tips: E3-SD E5-S E7-S P4-S G1-S G2-S universal wrench, Satelec type handpiece

Scaling




Periodontic



Endodontic



Endodontic

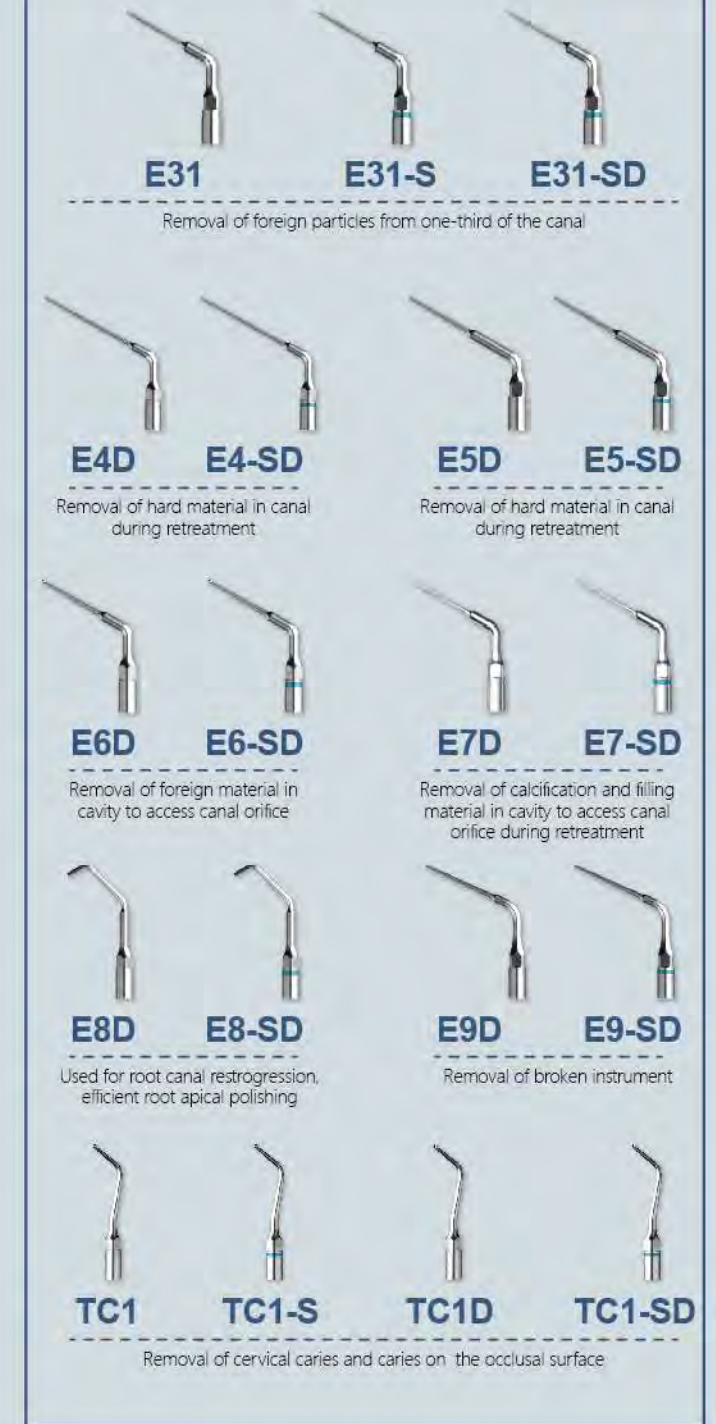

*Satelec and EMS are trademarks of Acteon® and EMS®, respectively.

*Satelec and EMS are trademarks of Acteon® and EMS®, respectively.



CuringPen

4 LEDs curing light

Technical parameter:

Dimension: 24*21*230(mm)
Net Weight: 109g
Lens size: 11mm


Power supply:
>1200 times, 3 Sec
Maximum light intensity



CuringPen



Smart controlling chip
keeps light output consistent
Light intensity:
1000mw/cm², 1500mw/cm², 2300mw/cm²
600 mw/cm²(detect mode)

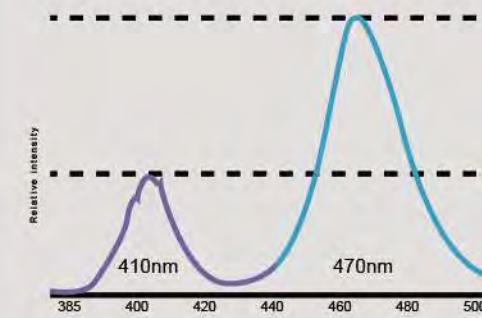

Wavelength:385-515nm
3 Blue, 1 Violet, 10w LED



360° rotatable head




Intensity digital display




Multiple Curing Options

Ramp mode

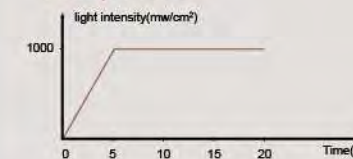

Pulse mode

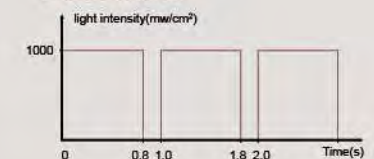

Caries detection



Notes: